GS 900 on Mobile Stand Assembly Instructions

Ships in 3 boxes

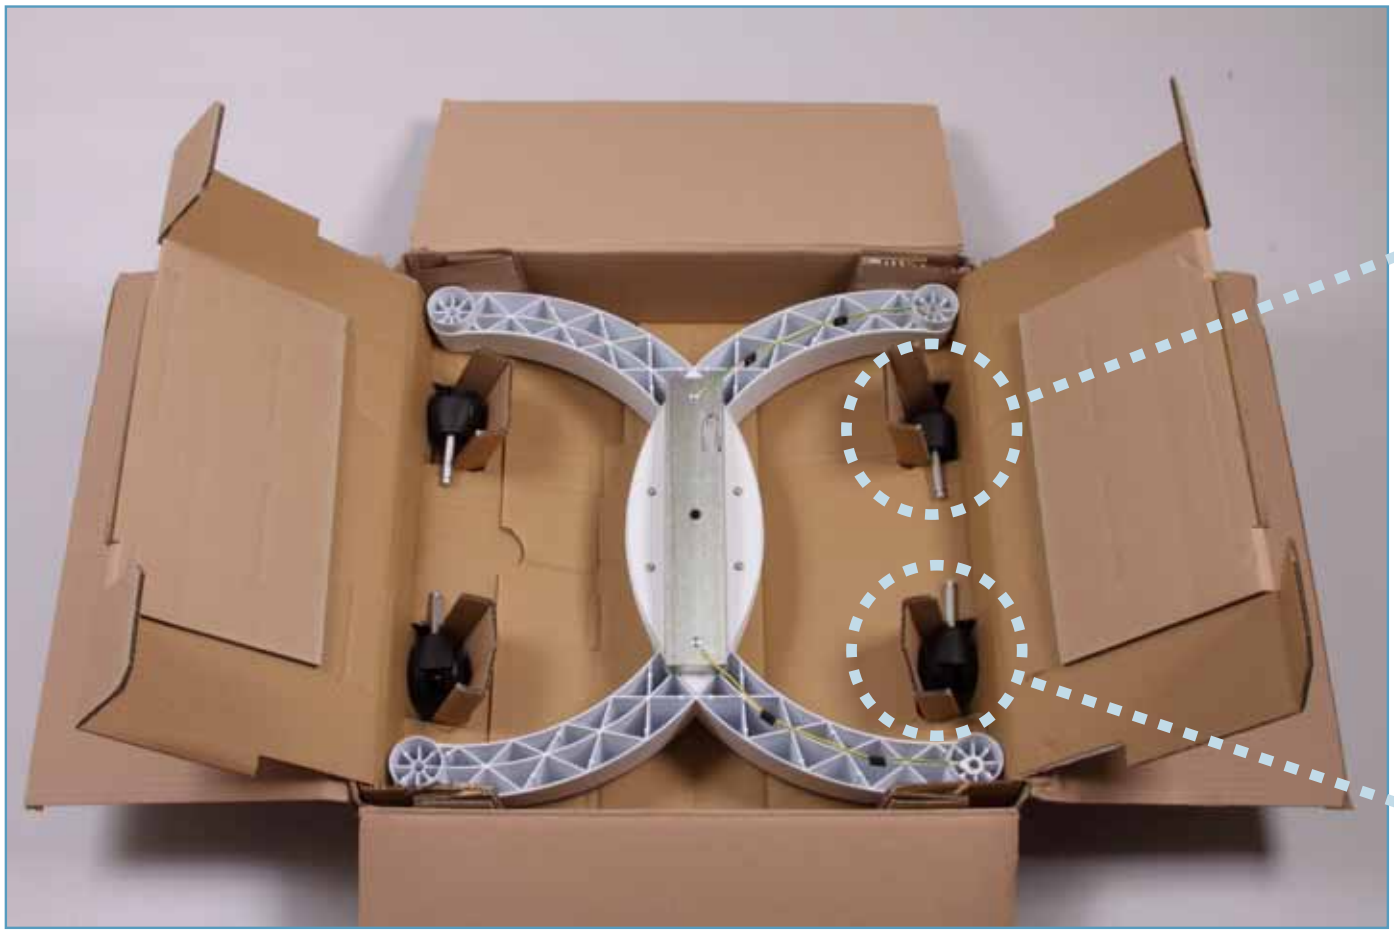

(2) wheels without brakes

(2) wheels with brakes

(2) wheels without brakes

(2) wheels with brakes
go through the ring cable

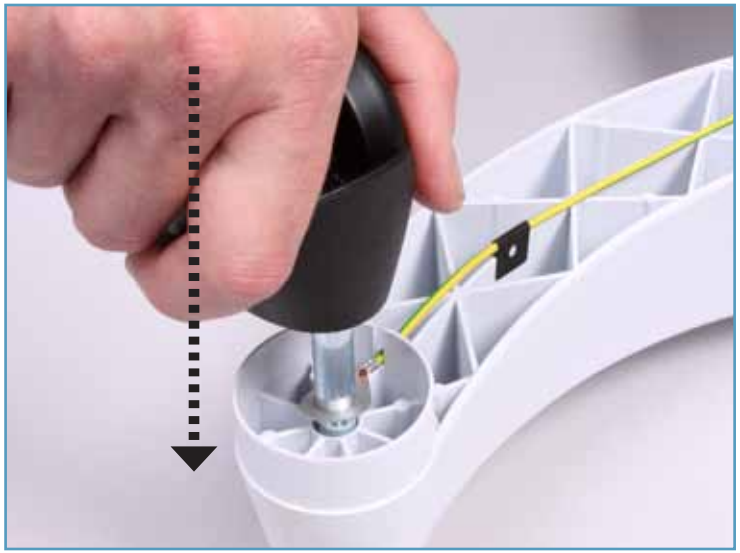

Place wheels with brakes through ring cable and insert completely

Insert two wheels without brakes completely

Parts included with Mobile Stand

Tools not included

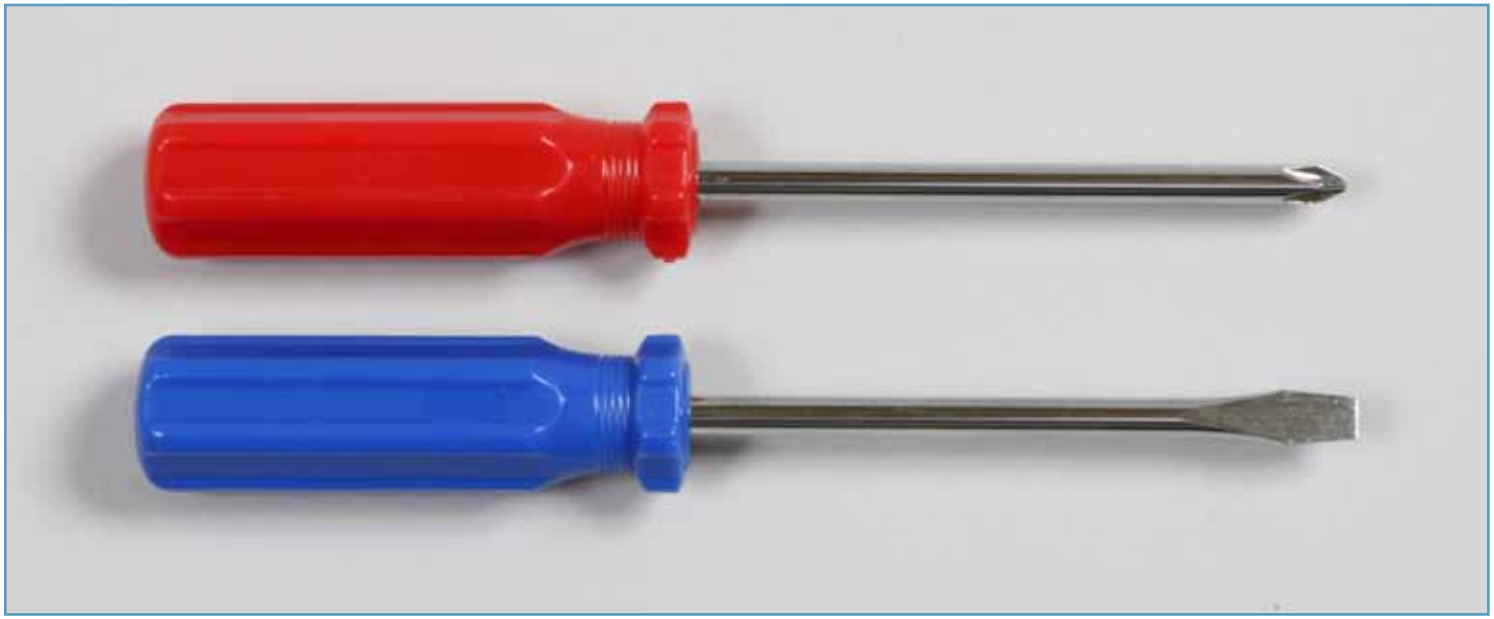

Insert two screws into pole

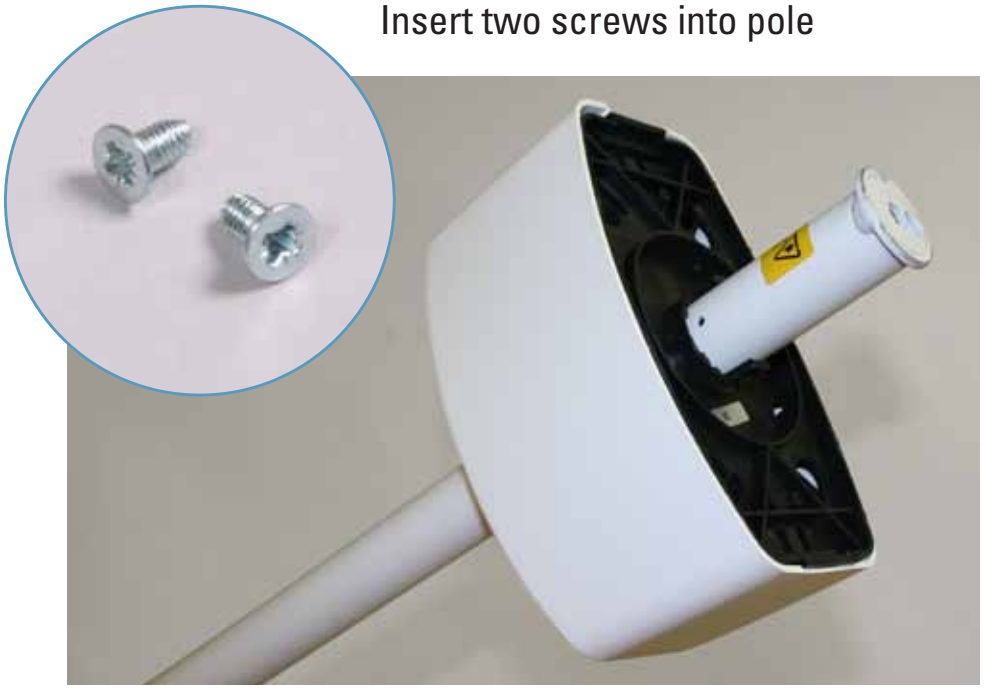

GS 900 on Mobile Stand Assembly Instructions

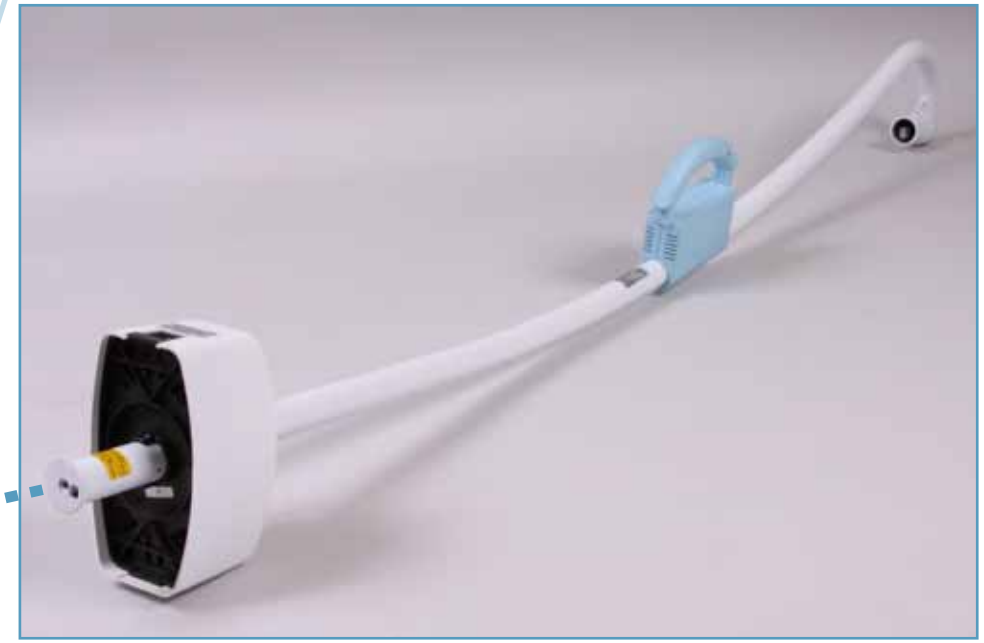

Insert the tripod tube so that the recess in the tube is seated in the nose of the tripod base and cannot be rotated any more

Assemble the winged screw with the spring washer and tighten

GS 900 on Mobile Stand Assembly Instructions

Remove and discard
grey protective cover

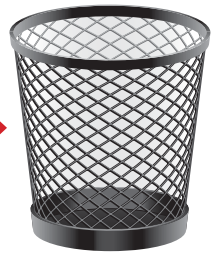

Unscrew the Phillips/plus-slotted screw, pull the cover off, pull cord through the top opening and insert the spring arm

Place the disk over spring arm

Place retaining ring over spring arm and secure into the pin groove

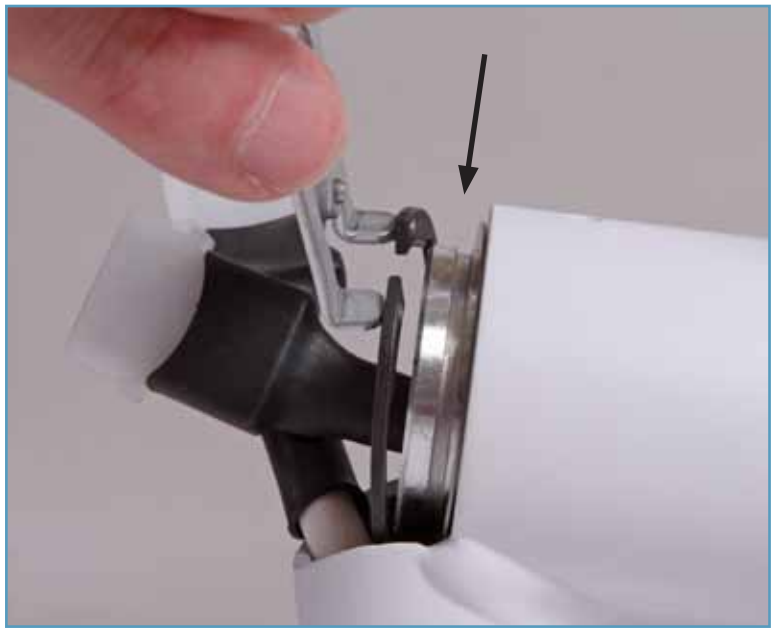

Make the electrical connection, tuck wires back inside, replace cover and tighten Phillips/plus screw

GS 900 on Mobile Stand Assembly Instructions

Remove and discard
grey protective cover

Loosen the slotted/minus screw

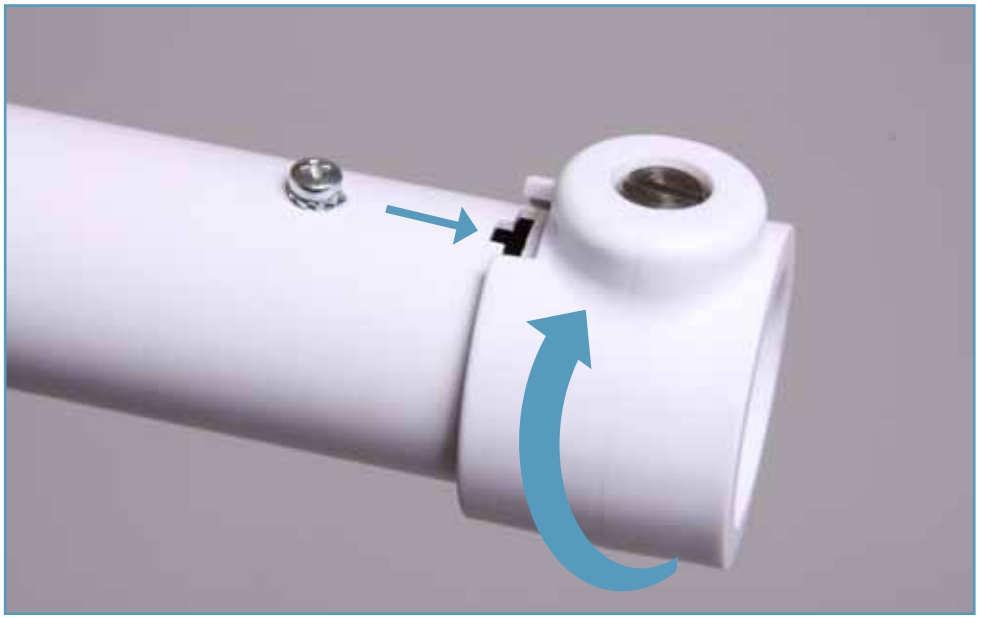

Loosen the Phillips/plus-slotted screw

Luminaire

Insert luminaire into the spring arm

Place securing segment completely into slot

Tighten the Phillips/plus-slotted screw, turn plastic sleeve 180° and tighten the slotted/minus screw

Plug in electrical connection to the unit and the wall

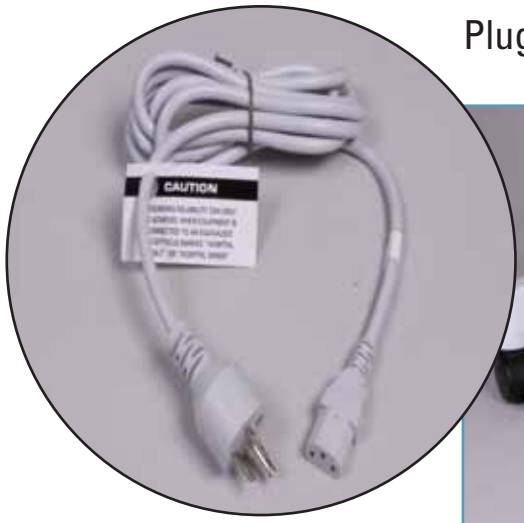

Turn on light

© 2010 MC7635